

Q-smart 450 & 850

Compact pulsed Nd:YAG lasers
with excellent beam quality and versatility




MAIN FEATURES

- Up to 850 mJ @ 1064 nm
- Robust and field proven technology
- Built to last thanks to ceramic reflectors and 100 million shots flashlamp lifetime warranty
- Plug & play harmonics modules down to 213 nm, with automatic phase-matching
- Cables and cooling lines fully disconnectable
- Intuitive touch screen interface and GUI
- Universal voltage
- SLM option (Single Longitudinal Mode)


MAIN APPLICATIONS

- LiDAR
- LIBS
- MATERIAL PROCESSING
- ABLATION
- PULSED LASER DEPOSITION
- PHOTOACOUSTIC IMAGING
- DYE, OPO & Ti:Sa PUMPING
- SPECTROSCOPY


Typical beam profiles




Q-smart 850
Near field @ 1064 nm



Q-smart 850
Near field @ 532 nm



Q-smart 850
Far field @ 1064 nm



6 ns standard temporal profile
@ 1064 nm (1 GHz oscilloscope)



6 ns temporal profile
@ 1064 nm with SLM option
(1 GHz oscilloscope)

www.quantel-laser.com

Many options and configurations are available.
Please contact Lumibird to find the best match for
your needs and compatibility between options.

Q-smart 450 & 850

Compact pulsed Nd:YAG lasers with excellent beam quality and versatility



SPECIFICATIONS

		Q-smart 450				Q-smart 850	
Repetition rate (Hz)		10	10-SLM	20	20-SLM	10	10-SLM
Energy per pulse (mJ)	1064 nm	450	370	400	330	850	700
	532 nm	220	150	200	135	430	290 / 340 ⁽¹⁾
	355 nm	130	75	120	70	230	135
	266 nm	60	35	50	30	100	60
	213 nm	10	On request	8	On request	20	On request
Pulse duration (ns) ⁽²⁾	1064 nm	~ 6					
	532 nm	~ 6					
	355 nm	~ 5					
	266 nm	~ 5					
	213 nm	~ 5					
Beam diameter (mm) ⁽³⁾	1064 nm	~ 6.5				~ 9	
Beam divergence (mrad) ⁽⁴⁾	1064 nm	< 0.5				< 0.5	
M ² ⁽⁵⁾	1064 nm	≤ 2				≤ 2	
Spatial profile @ 1064 nm ⁽⁶⁾ (fit to Gaussian)	Near Field ⁽⁷⁾	> 0.7		> 0.7		> 0.7	
	Far Field ⁽⁸⁾	> 0.95		> 0.9		> 0.9	
Polarization ratio (%) ⁽⁹⁾	1064 nm	> 90	> 80	> 80	> 70	> 80	> 70

- (1) 532 nm high energy version
- (2) Measured at FWHM with fast photodiode and 1 GHz oscilloscope
- (3) At the output of the laser
- (4) Full angle, at 1/e² of the peak
- (5) At 1/e² of the peak, measured by Spiricon LBA FWB
- (6) Least square fit to Gaussian (perfect fit = 1)
- (7) Measured at 1 m from laser output
- (8) Measured at the focal plane of a 2 m focus lens
- (9) Polarization is horizontal @ 1064, 355 & 266 nm and vertical @ 532 & 213 nm


Pulse to pulse energy stability (%) ⁽¹⁰⁾	1064 nm	± 2 (0.6)
	532 nm	± 4 (1.3)
	355 nm	± 6 (2)
	266 nm	± 8 (2.6)
	213 nm	± 12 (4)
Power drift (%) ⁽¹¹⁾	1064 nm	± 3
	532 nm	± 5
	355 nm	± 5
	266 nm	± 10
	213 nm	± 14
Pointing stability (µrad) ⁽¹²⁾	All wavelengths	< 40
Jitter @ 1064 nm (ns) ⁽¹³⁾	Standard	± 0.5
	SLM	± 1
Linewidth @ 1064 nm (cm ⁻¹)	Standard	≤ 0.7 ⁽¹⁴⁾
	SLM	≤ 0.005 ⁽¹⁵⁾

- (10) Peak to peak, 100% of the shots (RMS)
- (11) Over 8 hours, without readjustment of phase-matching, 18°C < T < 28°C
- (12) Measured by Spiricon LBA FWB RMS, on 200 pulses at the focal plane of a 2 m focus lens
- (13) With respect to Q-Switch trigger, measured at half width of 500 accumulated shots for 99 % of the shots
- (14) Measured at FWHM with a grating spectrometer with 0.045 cm⁻¹ resolution
- (15) Measured at FWHM with a slow scan Fabry-Perot etalon

OTHER INFORMATION		
Power requirements	100-240 VAC, 50/60 Hz, single phase, 1100 VA	
Cooling	Water to air	
Operating temperature	+ 18 °C to + 28 °C	
Storage temperature ⁽¹⁶⁾	- 10 °C to + 50 °C	
Cable length (m)	3 ⁽¹⁷⁾	
Flashlamps warranty	100 million shots ⁽¹⁸⁾	
Weight (kg)	Laser head	7
	Harmonic modules	2.1
	Integrated cooling & electronics	27

- (16) System rinsed and drained with ethylene glycol/water mixture
- (17) Other lengths up to 10 m on request
- (18) 80% of energy, or 1 year, whichever comes first

Laser head

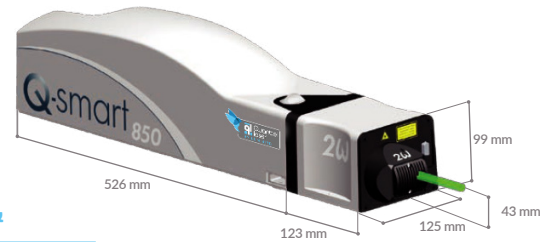


Integrated cooling & electronics



Q-touch

OPTIONS

Single Longitudinal Mode option (SLM)

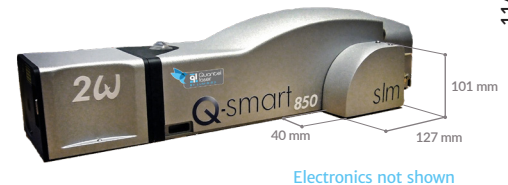

www.quantel-laser.com

Many options and configurations are available. Please contact Lumibird to find the best match for your needs and compatibility between options.



Lumibird has locations across the globe that are available to provide support for any product, service or inquiry. Visit www.lumibird.com to connect with any of our global sites.

