

ULTRA

Ultra compact pulsed Nd:YAG laser




MAIN FEATURES

- 1062, 532, 355, 266, 213 nm and 1.57 μm available
- Compact and portable, with quick umbilical disconnects
- Choice of resonators available to meet the need of demanding applications
- Integrated motorized variable attenuator and harmonics options
- Fiber coupling available at 1064 nm and 532 nm
- MIL-STD-810 tested to withstand harsh environments


MAIN APPLICATIONS

- LIBS
- PUMPING
- FPD REPAIR
- LiDAR
- ABLATION
- PULSED LASER DEPOSITION
- PHOTOACOUSTIC IMAGING


Typical beam profiles




Ultra 50, Stable
Near field @ 1064 nm




Ultra 50, GRM
Far field @ 532 nm



Ultra 20, TEM₀₀
Far field @ 355 nm



Ultra 50, Stable
Near field @ 266 nm



Ultra 100, GRM
Far field @ 213 nm

REV C - Lumibird reserves the right to modify the specifications without prior notice.

www.quantel-laser.com

Many options and configurations are available. Please contact Lumibird to find the best match for your needs and compatibility between options.



Lumibird has locations across the globe that are available to provide support for any product, service or inquiry. Visit www.lumibird.com to connect with any of our global sites.



ULTRA

Ultra compact pulsed Nd:YAG laser



SPECIFICATIONS

		ULTRA 20		ULTRA 50		ULTRA 100	
Resonator type		Stable ⁽⁶⁾		Stable	GRM	Stable	GRM
Repetition rate (Hz)		1 to 50		1 to 20	20	1 to 20	20
Energy per pulse (mJ)	1064 nm	20		50		100	
	532 nm	12		30		55	
	355 nm	4		12		30	
	266 nm	4		10		25	15
	213 nm	-	-	-	-	4	On request
	1.57 μm	-	8	-	-	25	-
Pulse duration (ns) ⁽¹⁾	1064 nm	< 13	< 10	< 9	< 10.5	< 9	
	532 nm	< 12	< 9	< 9	< 8	< 8.5	
	355 nm	< 11	< 8	< 8	< 8	< 7.5	
	266 nm	< 11	< 8	< 8	< 8	< 8	
	213 nm	-	-	-	< 7	-	
	1.57 μm	-	< 10	-	< 9	-	
Beam diameter (mm) ⁽²⁾	1064 nm	2.5		3		4	
Beam divergence (mrad) ⁽³⁾	1064 nm	< 6	< 7	< 1.5	< 8	< 1.5	
	532 nm	< 5	< 6	< 1.5	< 7	< 1	
	355 nm	< 4	< 5	< 1.2	< 5	< 1.5	
	266 nm	< 4	< 7	< 1.5	< 4	< 1.5	
	213 nm	-	-	-	< 3	-	
	1.57 μm	-	< 12	-	< 12	-	
Polarization ratio (%) ⁽⁴⁾	1064 nm	> 99	> 98	> 98	> 98	> 98	
Pulse to pulse energy stability (%) ⁽⁵⁾	1064 nm	< 2.5	< 2	< 4	< 2	< 2	
	532 nm	< 4	< 2.5	< 5	< 2.5	< 2.5	
	355 nm	< 3	< 3	< 6	< 2	< 3	
	266 nm	< 3	< 3	< 6	< 2	< 3	
	213 nm	-	-	-	< 2	-	
	1.57 μm	-	< 2	-	< 2	-	

Power drift (%) ⁽¹⁾	1064 nm	± 5
Pointing stability (μrad) ⁽²⁾	All wavelengths	< 50
Jitter (ns) ⁽³⁾	All wavelengths	< ± 2
Linewidth (cm-1) ⁽⁴⁾	1064 nm	1

(1) Over 8 hours, 18 °C < T < 28 °C, for ΔT < ± 5 °C

(2) Full angle, 99 % of shots

(3) With respect to Q-Switch trigger


(4) Measured at FWHM

OTHER INFORMATION		
Power requirements		100-240 VAC, 50/60 Hz, single phase, 850 VA
Cooling		Water to air
Temperatures	Operating	+ 10 °C to + 40 °C
	Storage	+ 5 °C to + 70 °C
Laser head sealing		IP 66
Vibration and shocks		Complies with MIL-STD-810
Max. altitude (m)		2000
Cable length (m)		3 ⁽¹⁾
Flashlamps warranty		50 million shots ⁽²⁾
Weight (kg)	Laser head	0.9
	Harmonic modules	0.5
	Integrated cooling & electronics	14 (standard)

(1) Other lengths up to 15 m on request

(2) 80 % of energy, or 1 year, whichever comes first

Laser head

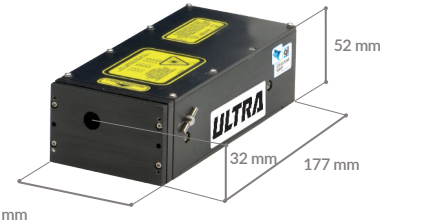

Remote Box



Integrated cooling & electronics




OPTIONS

19" rack integrated cooling & electronics




Wavelength separation

One (WS1) or two (WS2) apertures with rotatable beam blocks




Motorized variable attenuator at 1064 nm



Harmonic generators (2ω, 2ω/3ω, 2ω/4ω)





1.57 μm OPO option



Fiber optic launch adaptor

Dimensions for 1064 and 532 nm versions
Up to 10 % loss



www.quantel-laser.com

Many options and configurations are available. Please contact Lumibird to find the best match for your needs and compatibility between options.

Lumibird has locations across the globe that are available to provide support for any product, service or inquiry. Visit www.lumibird.com to connect with any of our global sites.

